


FS0142

High Resolution Semi-Sinterable Silver Conductor

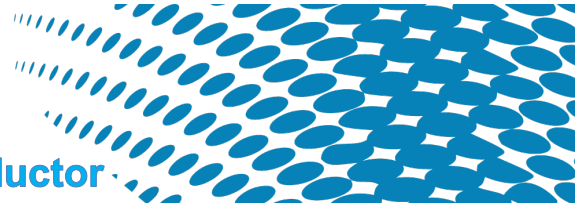

Product Description

ACI FS0142 is a hybrid or semi-sintering silver-based conductor supplied at high viscosity/solids enabling high resolution printed circuitry for flexible hybrid electronic devices on flexible or rigid substrates. ACI's Alchemy Conductive Inks offer the ease of use and processing of polymer thick film silvers, and the superior conductivity of nanoparticle based sintering inks. The FS0142 series offers even lower volume resistivity than the FS0117 series. After curing, reflow soldering can be used for component attach using some low temperature solder pastes and/or by using specific substrates available from ACI. FS0142 should be compatible with most dielectric/insulator inks and solder mask materials.

Product Benefits

- Reduced silver usage enables cost savings
- Enables SMD attachment using low temperature solder pasted and substrates (PET)
- Enables higher power and current density applications
- Sinters well at greater film thickness than nano inks, enabling both low volume resistivity and low sheet resistance
- Superior mechanical performance (flex and crease ability)
- Allow high resolution printing without compromising conductivity/resistance
- Higher speed curing than nanoinks
- Superior performance when processed at similar conditions used for traditional polymer thick films

Typical Performance

Volume resistivity 150°C for 15 min in box oven	< 0.002 Ω/square/mil < 6.0 x 10 ⁻⁶ Ω·cm
Adhesion ¹	4B
U-flex and crease ability	Contact ACI for data related to your application

¹ Method based on ASTM D3359 Method B tested on 0.005" Melinex® ST506 PET

Typical Properties as Supplied

Physical State	Viscous silver paste
Viscosity ²	15 Pa·s
Density	3.72 g/cm ³
Percent Solids ³	81%
Shelf Life at 20°C	12 Months

Processing

Deposition methods	Screen printing; micro dispense		
Curing Time and Temperatures	<5-15 min in box oven at 150°C ≤5 min in industrial conveyor oven at 150°C, ≤3 min with IR		
Recommended Screen Mesh Mesh counts are in threads per inch (TPI)	420/20µm V-Screen Next 11-18 µm thread stainless steel & tungsten meshes		
Emulsion Over Mesh (EOM) Thickness	6µm or minimum recommended for mesh		
Recommended Squeegee	RKS Carbon BW or S HQ		
Theoretical Dry Film Thickness (w and w/o EOM ⁴)	380/34 µm PET	~7 µm	~5 µm
	460/27 µm PET	~7 µm	~5 µm
	420/20 µm VSN	~10 µm	~7 µm
Coverage for Recommended meshes (w and w/o EOM ⁴)	380/34 µm PET	~15 m ² /kg	~22 m ² /kg
	460/27 µm PET	~16 m ² /kg	~25 m ² /kg
	420/20 µm VSN	~11 m ² /kg	~15 m ² /kg
Mixing	Slow thorough mix, avoid inducing bubbles, fixed spatula in rotating jar ideal ⁵		
Recommended Thinner/Diluent	TD8106		
Clean Up Solvents	Acetone/MEK/Similar Solvents		


² Measured on Anton Paar MCR302 Rheometer at 10⁻¹ sec shear rate at 25°C after preshearing at 100⁻¹ for 5 min

³ 150°C for 120 min in box oven

⁴ Estimates relevant for finer and coarser feature printing respectively

⁵ AT-LM4 Stirring Type Mixer (E211) recommended



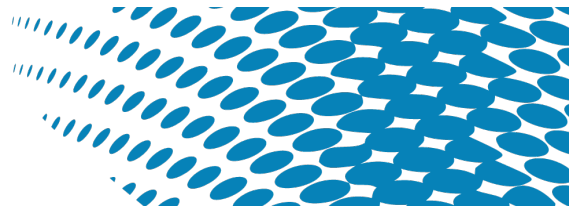

Contact ACI

Email: info@acimaterials.com

Phone: (805) 324-4486

Website: www.acimaterials.com

Mailing and Shipment Address

ACI Materials, Inc.

44 Castilian Drive

Goleta, CA 93117

Caution

Proper industrial safety precautions should be exercised in using these products. Use with adequate ventilation. Avoid prolonged contact with skin or inhalation of any vapors emitted during use or heating of these compositions. The use of safety eye goggles, gloves or hand protection creams is recommended. Wash hands or skin thoroughly with soap and water after using these products. Do not eat or smoke in areas where these materials are used. Refer to appropriate SDS information.

Disclaimer

The product information and recommendations contained herein are based on data obtained by tests we believe to be accurate, but the accuracy and completeness thereof is not guaranteed. No warranty is expressed or implied regarding the accuracy of these data, the results obtained from the use hereof, or that any such use will not infringe any patent. ACI Materials, Inc. assumes no liability for any injury, loss, or damage, direct or consequential, arising out of its use by others. This information is furnished upon the condition that the person receiving it shall make their own tests to determine the suitability thereof for their particular use, before using it. User assumes all risk and liability whatsoever in connection with their intended use. ACI Materials' only obligation shall be to replace such quantity of the product proved defective.

